




PRODUCT SPECIFICATIONS

BULLDUCK .T.T™

Bullduck T.T. has a Tearstop construction with Terylene/Cotton cospun threads woven throughout the fabric. These threads are woven in both the warp and weft directions to reinforce the tear and tensile qualities of this very strong canvas. The fabric is designed specifically for very large semi-trailer truck tarpaulins where extra strength is required.

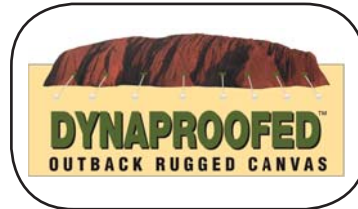

WEIGHT:	Loomstate: 426g/sq.m (12.6 oz) +/- 30gsm Dynaproofed: 535g/sq.m (16 oz) +/- 30gsm
WIDTH:	Loomstate: 214cm Dynaproofed: 200cm
CONSTRUCTION:	Woven 50/50 Poly/Cotton Tearstop Weave 23.6 ends per cm. 15.3 picks per cm. Yarn Count 2/12 ECC x 2/12 ECC (2/10 Cospun tear threads)
Maximum Shrinkage	2% in Warp
Tear Resistance: (AS 2001.2.10)	WARP – 207N WEFT – 125N
Breaking Force (AS 2001.2.3)	WARP – 2589N WEFT – 1644N
Hydrostatic Head: (AS 2001.2.17)	1000mm min
Cone Test: (AS 2001.2.18)	Pass
Stock Colours:	Antelope, Blue, Green, Grey, Olive and Red

